
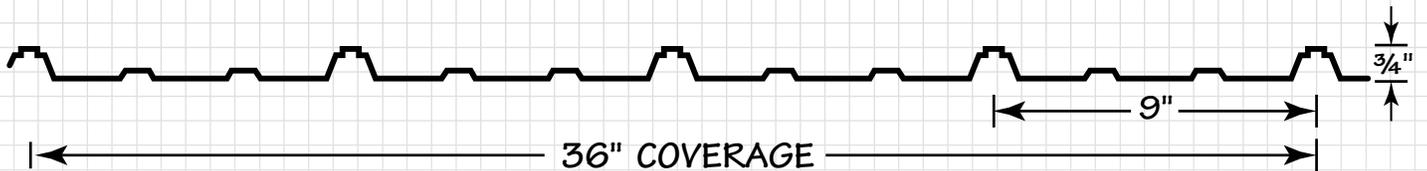


Panel-Loc Plus™

Wall and Roof Panel

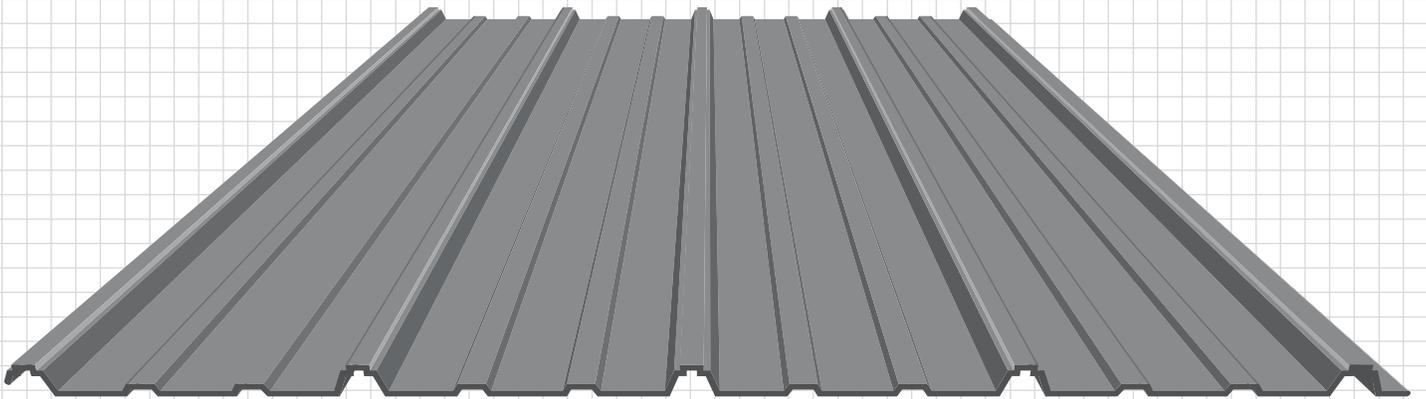

Choose the right option to fit your needs

		CENTRALGUARD® PROTECTION	FADE RESISTANCE	DENT RESISTANCE	RUST RESISTANCE	WARRANTY
Ultra 26 Gauge Premium Option	For a small amount more than Prime, upgrade to Ultra.	Yes	40% More Resistance than Thrifty	220% More Resistance than Thrifty	Added Rust-Through Resistance	20 Year Rust-Through 30 Year Chalk & Fade 40 Year Paint Adhesion
Prime 29 Gauge The industry leader	For a small amount more than Thrifty, upgrade to Prime.	Yes	40% More Resistance Than Thrifty	25% More Resistance Than Thrifty	Added Rust-Through Resistance	20 Year Rust-Through 30 Year Chalk & Fade 40 Year Paint Adhesion
Thrifty 29 Gauge	Our least expensive option.	No	Basic Resistance	Basic Resistance	Basic Resistance	NO Rust-Through NO Chalk & Fade 20 Year Paint Adhesion

Ultra Panel-Loc Plus features UL2218 approval for impact resistance and may qualify for a home owner's insurance discount. See your local insurance agent for qualifications.

Panel-Loc Plus™ provides superior durability by adding a striation on top of the rib, giving it even more strength. Available in 3 options, Panel-Loc Plus™ gives residential, agricultural, and light commercial projects the protection of steel with an attractive appearance. Panel-Loc Plus™ from Central States® has become the standard for excellence in the industry.

- Recommended for pitches 3:12 and above.
- Employs our state-of-the-art siphon groove, a drain channel that guards against wind, rain, and snow; minimizing leaks.
- 36" panel coverage.
- Wide fastening surface for easy application.
- Unique lap groove hides the overlap, giving a smooth, clean appearance.



Prime / Ultra Panel-Loc Plus™ Specs

Gauge	26 and 29
Steel Thickness	26ga 0.0185" 29ga 0.0150"
Paint Thickness	Top coat paint: .80 mils Top coat primer: .20 mils Bottom coat backer: .35 mils Bottom coat primer: .35 mils
Rust Protectant Substrate	Galvalume® AZ50, painted Galvalume® AZ55, acrylic bare
Total Thickness of Panel	26ga 0.0202" 29ga 0.0167"
Steel Strength	80,000 PSI min
Paint System	CentralGuard®, powered by Valspar®
Warranty	40 yr paint adhesion 30 yr chalk and fade 20 yr Galvalume® perforation warranty

Testing & Approvals

TESTING

TAS 100-95	Wind Driven Rain Test
TAS 125-03	Uplift Resistance Test, 29 gauge
UL580	Uplift Resistance Test, 29 gauge
ASTM-E455	Diaphragm Shear Standard Test, 26 gauge
ASTM-E455	Diaphragm Shear Standard Test, 29 gauge

APPROVALS

UL2218	UL Approval, Impact Resistance
UL580	UL Approval, Uplift Resistance
UL790	UL Approval, Fire Resistance, Class A
RC-325	Texas Windstorm Approval, 29 gauge over wood purlins
RC-326	Texas Windstorm Approval, 29 gauge over decking
FL14026.1	Florida Approval, Roof Panel over 15/32" Plywood (HVHZ, Miami-Dade approved)
FL16229	Florida Approval, Roof Panel over 15/32" Plywood (NON-HVHZ)
FL17133	Florida Approval, Panel over 2X4's (NON_HVHZ)



www.CentralStatesMfg.com