


R-Loc™

Commercial Roof and Wall Panel

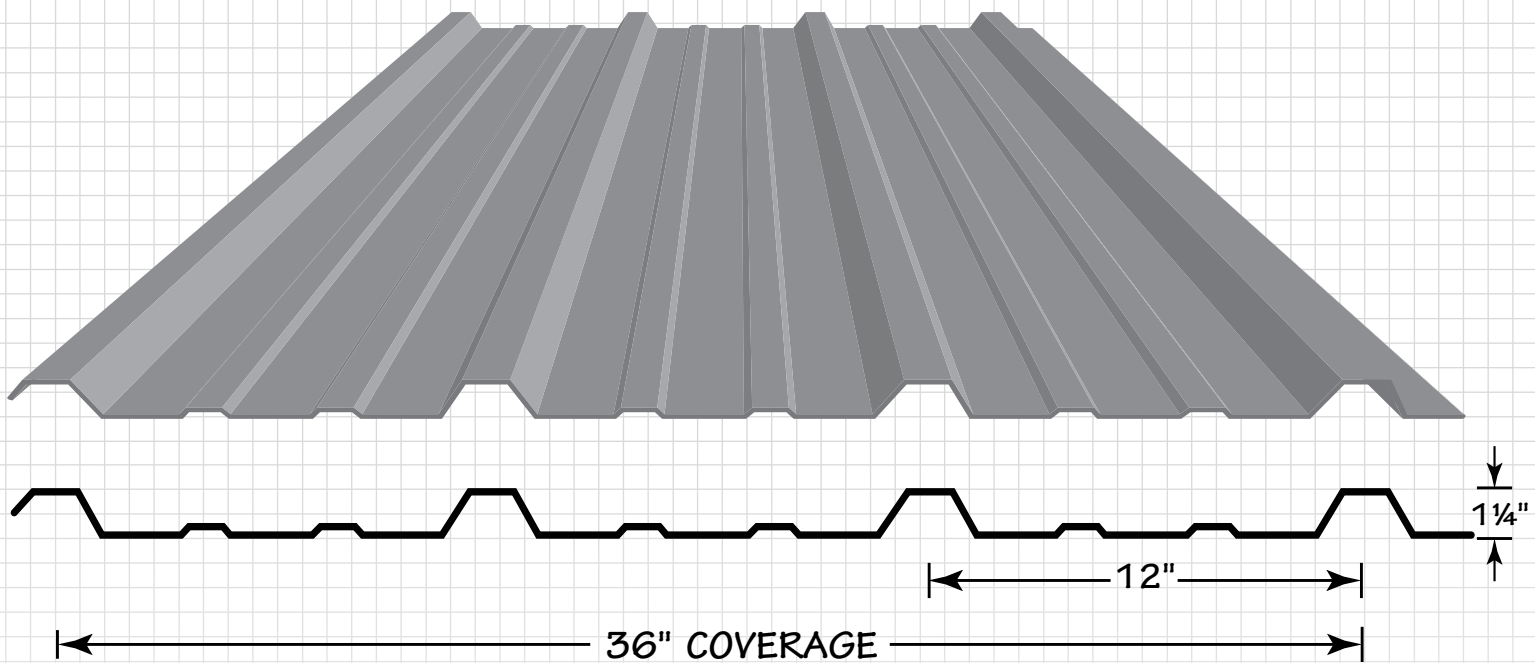

R-Loc™

Commercial Roof and Wall Panel


The R-Loc™ panel meets the needs of today's commercial market while remaining extremely cost effective. Commonly referred to as PBR-panel, this 26 gauge commercial panel is an excellent choice for your projects that require commercial grade performance. R-Loc™ is designed to maximize the potential of your structures, specifically the steel frame. With an added purlin bearing leg, you can count on easier installation and a more pleasing appearance.

- Industry standard configuration allows maximum purlin spacing for cost-effective building.
- Recommended for 1/2/12 or greater roof slopes, and ideal for low pitch commercial roofs.
- Available in 26 gauge painted or acrylic Galvalume®.
- 36" panel coverage.
- Matching trims and accessories are available.



Prime R-Loc™ Specs

| | |
|---------------------------|---|
| Gauge | 26 |
| Steel Thickness | 0.0185" |
| Paint Thickness | Top coat paint: .80 mils Top coat primer: .20 mils Bottom coat backer: .35 mils Bottom coat primer: .35 mils |
| Rust Protectant Substrate | Galvalume® AZ50, painted Galvalume® AZ55, acrylic bare |
| Yield Strength | 80,000 PSI min |
| Paint System | CentralGuard®, powered by Valspar® |
| Warranty | 40 yr paint adhesion 30 yr chalk and fade 20 yr Galvalume® perforation warranty |
| Testing | Uplift: UL580, Class 90 and ASTM 1592 Impact: UL2218, Class 4 Fire resistance: UL790, Class A Foot traffic: FM 4471 Florida approval: FL14016.3, FL14024.1 Texas windstorm: RC-424 |
| Colors | Available in 19 ENERGY STAR rated colors Brilliant Colony Gallery Lt. Stone Brown Copper Metallic Gray Polar Burgundy Crimson Gold Rustic Burnished Slate Desert Hawaiian Tan Charcoal Fern Hunter |

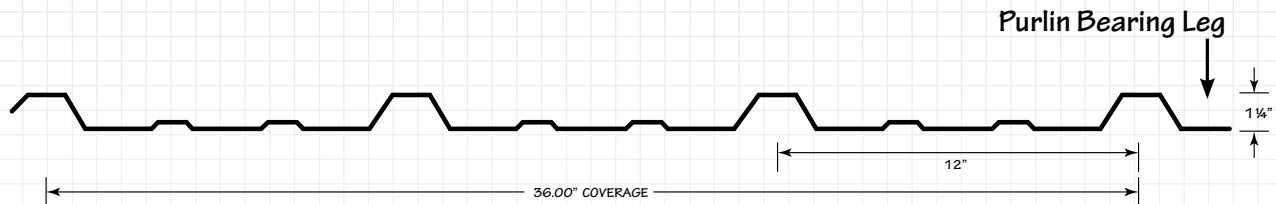

www.CentralStatesMfg.com